


INNOVATIVE PRODUCTS FOR CHALLENGING APPLICATIONS

LAVANTURE PRODUCTS

EST. 1969 CO.

TRIMS-SEALS-TAPES-ADHESIVES

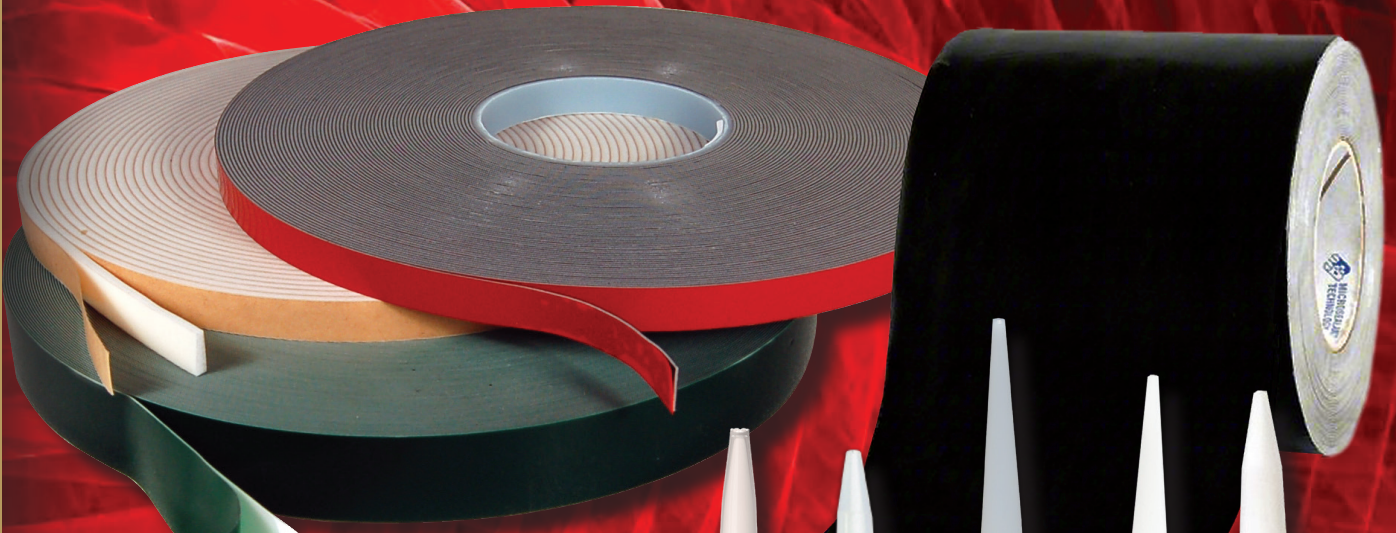

LIMITED WARRANTY. **WARNING: HYBRID SEALANT**



For more than 50 years, LaVanture Products has listened to the needs of our customers. We have invested in our future to help build yours. From hands on product design to on-hand inventory, LaVanture strives to offer the most advanced technologies to the industry. We have hundreds of adhesive and sealant options that are used in RV, Marine, Utility Trailer, and Speciality Product markets.

LaVanture has hand selected leading manufacturers to build and produce quality products with on-time delivery you have been accustomed to as a partner of LaVanture Products.

Whether your application requires an adhesive or sealant, LaVanture offers both in 'gun-grade' or tape form. Our technologies range from Latex to high bond tapes.

Contact your Account Manager today or e-mail us at: sales@lavanture.com

THE LAVANTURE ADVANTAGE...

Since 1969 LaVanture Products Company has been providing the best total package of products and services to our customers. We invest in our future so we can continue to meet market demands and customer needs. When you select LaVanture Products, you provide your business with the LaVanture advantage:

- **Quick & Personal Response**
- **Quality Products**
- **Continuous Innovation**
- **Competitive Pricing**
- **Courteous Service**
- **On time Delivery**



This Trims, Seals and Foam Tape catalog features innovation, and high quality products to meet the challenging applications of today's markets.

Our Goal is Simple:

- **Distribute high quality products that meet customer needs at a fair price with on-time delivery.**

We have been providing customers with high quality products to meet the challenging applications of today's markets. LaVanture stocks and distributes a full line of quality Sealants, Trims, Seals, and Foam Tape making it the single source leader for superior sealing solutions to the O.E.M. market. The sealant products are available in cartridges, sausages, and drums.

LaVanture Products is a major distributor of many hardware products from leading manufacturers all across the country and world. Most products are in stock and available for immediate shipment. We also carry a wide range of products to seal your applications. LaVanture has a full line of "in stock" EPDM extrusions and a full line of caulks and sealants to handle any application. Our foam tapes are automotive grade and we stock over 200 sizes and styles at all times.

Our warehouse has over 10,000 different parts designed by us for the RV and Marine OEM markets. We use more than five extruders and injection molders to manufacture our parts. The parts are made to our specifications and we stand behind what we sell.

LaVanture has you covered from start to finish no matter what you're manufacturing. Give us a call today or visit our website to view our complete line of product catalogs.

TABLE OF CONTENTS

| | |
|---|-------------------|
| LaVanture Advantage | Page 1 |
| Automotive Seals | Page 3-4 |
| <i>Hollow Bulb seals</i> | |
| PVC Foam Sealing Tapes | Page 5-9 |
| <i>Light, Medium, Heavy Density</i> | |
| Specialty Foam Tapes | Page 10-11 |
| <i>TPE, PE, PVC, Acrylic, Neoprene</i> | |
| Hi Bond Tapes | Page 12 |
| <i>Solid Acrylic, Impregnated Foam, VHB, GHB</i> | |
| Butyl Tapes | Page 13 |
| <i>EPDM, Cross-Linked, Rubber</i> | |
| Specialty Seals | Page 14 |
| <i>EPDM</i> | |
| Standard Edge Trim | Page 15-16 |
| <i>PVC Pinch, Pinch with Bulb</i> | |
| Silicone and Acrylic Sealants | Page 17-20 |
| <i>Acetoxy, Latex, Neutral Cure</i> | |
| Adhesives and Sealants | Page 21-25 |
| <i>Elastomeric, Hybrid Polymer, Latex, Polyurethane</i> | |
| EternaBond Sealant Tape | Page 26 |
| <i>Micro-sealant RV Seal, Roof Seal, Anti-wick</i> | |
| Floor Adhesive | Page 27 |
| <i>Water-based, Acrylic-based</i> | |
| Structural Adhesives | Page 28 |
| Adhesives Technical Specifications | Page 29 |
| Industry Application Chart | Page 30 |



All of these products meet our quality standards and have passed a rigid testing program. If we sell it ...we stand behind it!



NEW 2-UP SEALS

This new product is 2 seals extruded as one with a thin membrane that you can tear apart, saving you production time. Call for pricing and availability.

SPECIFICATIONS

Most LaVanture EPDM rubber seals are medium density, 45-50 durometer. Standard Rubber Manufacturers Association (RMA) tolerances apply to all the EPDM rubber seals.

ADHESIVES FOR EPDM

PSA : Pressure Sensitive Adhesive tape.

HATS: Orange or Red liner represents 'Heat Activated Tape' for adhesive with extreme holding power.'

FILAMENTS: PSA with embedded fiberglass fibers for greater stability.

APPLICATIONS

- Ramp Doors
- Slide Outs
- Door Hatches
- Live Wells
- Concession Doors

SPECIALITY SEALS

Custom designed profiles and colors are also available to meet special applications. Please call for information.

Hollow D, Hollow P, Ribbed Rectangle and Speciality Seals

Hollow D Bulb Seals

| Stock No. | Width x Height | Color | Adhesive | Ctn. Qty |
|------------|----------------|-------|----------|----------|
| LP1085 | .354" x .205" | Black | PSA | 1000' |
| LP1153W | .375" x .250" | White | PSA | 1000' |
| LP105 | .375" x .438" | Black | PSA | 500' |
| LP108 | .500" x .360" | Black | PSA | 500' |
| LP108W | .500" x .360" | White | PSA | 500' |
| LP101 | .500" x .500" | Black | PSA | 500' |
| LP202 | .500" x .500" | Black | PSA | 450' |
| LP5036-H | .500" x .696" | Black | HATS | 500' |
| LP5036-PSA | .500" x .696" | Black | PSA | 500' |
| LP5080-H | .500" x .800" | Black | HATS | 500' |
| LP109 | .610" x .360" | Black | PSA | 500' |
| LP2601-PSA | .640" x .500" | Black | PSA | 500' |
| LP119 | .750" x .375" | Black | PSA | 250' |
| LP119-500 | .750" x .375" | Black | PSA | 500' |
| LP135 | .750" x .562" | Black | PSA | 250' |
| LP135-H | .750" x .562" | Black | HATS | 250' |
| LP135W-H | .750" x .562" | White | HATS | 250' |
| LP135-FT | .750" x .562" | Black | FILAMENT | 500' |
| LP1705 | .625" x .400" | Black | PSA | 500' |
| LP128 | .750" X .750" | Black | PSA | 200' |
| LP1750 | .825" x .760" | Black | PSA | 150' |
| LP1750-H | .825" x .760" | Black | HATS | 400' |
| LP691 | .875" x 1.00" | Black | PSA | 250' |
| LP691-H | .875" x 1.00" | Black | HATS | 250' |
| LP691 W-H | .875" x 1.00" | White | HATS | 250' |
| LP402 | 1.50" x .500" | Black | PSA | 250' |

Hollow P Bulb Seals

| Stock No. | Width x Height | Color | Adhesive | Ctn. Qty |
|-----------|----------------|-------|----------|----------|
| LP589 | 1.250" x .848" | Black | PSA | 200' |
| LP589-H | 1.250" x .848" | Black | HATS | 250' |
| LP589NA | 1.250" x .848" | Black | NONE | 250' |
| LP2452-H | 2.625" X .875" | Black | HATS | 100' |

Rectangle Seals

| Stock No. | Width x Height | Color | Adhesive | Ctn. Qty |
|-----------|----------------|-------|----------|----------|
| LP113 | .375" x 188" | Black | PSA | 1000' |
| LP2897 | .500" x .300" | Black | PSA | 500' |
| LP376 | .589" x .123" | Black | PSA | 1000' |
| LP103 | .625" x .375" | Black | PSA | 400' |

Speciality Seals

| Stock No. | Width x Height | Color | Adhesive | Ctn. Qty |
|-----------|---------------------|-------|----------|----------|
| SP0445 | 700" x 1.775" Wiper | Black | PSA | 200' |
| LP2028 | .905" x .290" | Black | NONE | 500' |
| LP214-H | .950" x .710" | Black | HATS | 500' |

2 Up Seals

| Stock No. | Width x Height | Color | Adhesive | Ctn. Qty |
|----------------|----------------|-------|----------|----------|
| LP113-2UP | .375" x .188" | Black | PSA | 1000' |
| LP103-2UP | .625" x .375" | Black | PSA | 400' |
| LP119-2UP | .750" x .375" | Black | PSA | 500' |
| LP135-2UP | .750" x .562" | Black | PSA | 250' |
| LP128-2UP | .750" x .750" | Black | PSA | 200' |
| LP125-2UP | .775" x .500" | Black | PSA | 250' |
| LP5034-PSA-2UP | .650" x .540" | Black | PSA | 300' |

Adhesives:

Adhesives are available for a wide variety of applications in two formats: 3M™s heat activated tape system, (HATS) and a pressure sensitive (PSA) format. Both systems have been tested and have passed our rigid performance requirements.

Custom Seals

Custom designed profiles and colors are also available to meet special applications. Please call for information.



LP1085

LP1153

LP105

LP108




LP101

LP202

LP5036-H

LP109

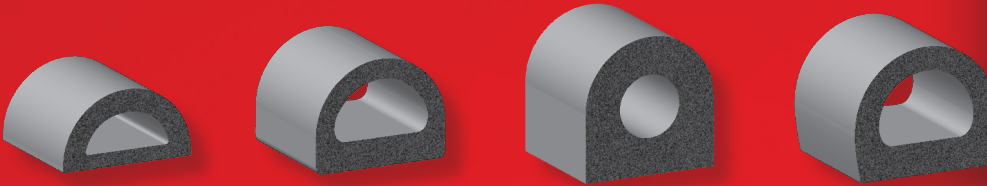


LP119

LP135

LP128

LP1750

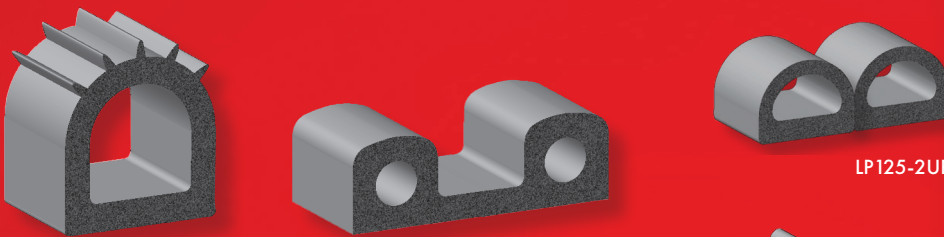

LP691

LP402

LP125-2UP




LP5080-H



LP589

LP2028

LP103-2UP

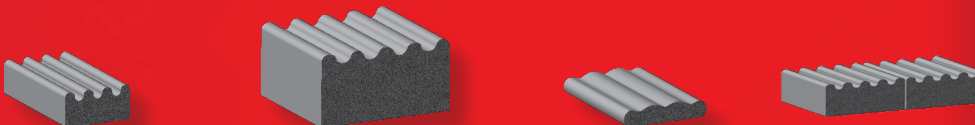


LP113

LP2897

LP376


LP113-2UP

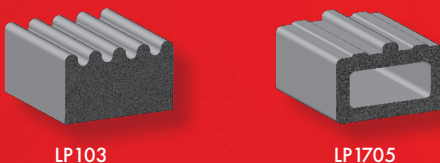

LP103

LP1705



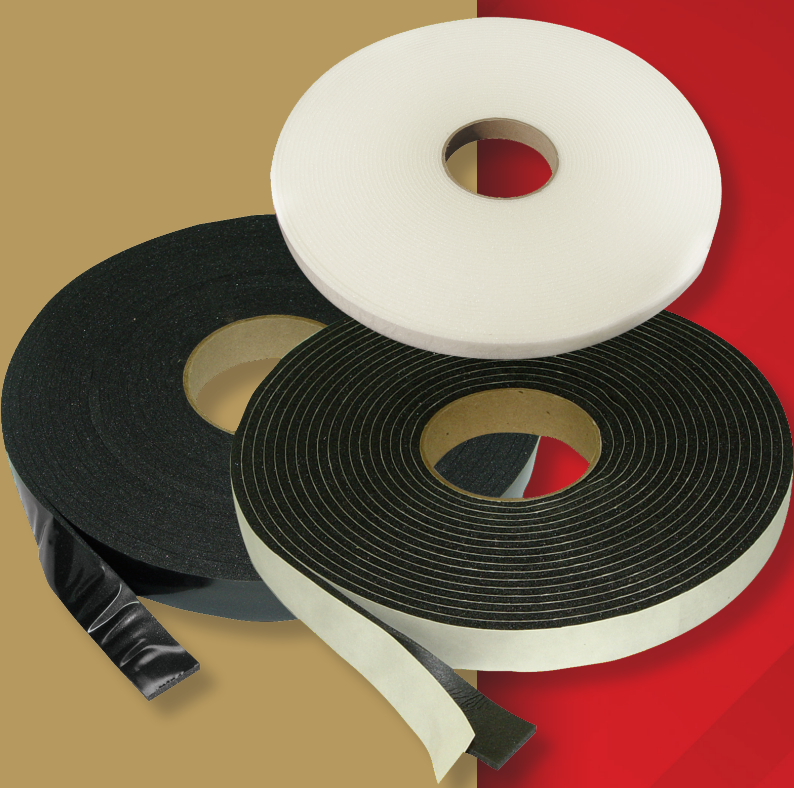

Light Density Foam Cap Tape®

Cap Tape® was developed initially to provide an economical seal between pickup truck caps and body side rails. Today, Cap Tape® is used effectively for a variety of noncritical industrial and commercial sealing applications. The tape flexes to fill-in and seal irregular surfaces and conditions against vibration and rattles. TP Series is cast-on 83# white paper and TM Series is cast-on 1.5 polyester film.

Typical Industry

Applications Include:

- Truck Caps
- Recreational Vehicle
- Automotive Aftermarket
- Weather Stripping

DIE CUTS for your application available for quotes.

Physical Properties *

| | |
|--------------------------|-----------------------------|
| Density and Hardness: | 6 lbs./cu.ft./20 (shore 00) |
| Compression Deflection: | 1.8 psi @ 25% |
| Compression Set: | 7 @ 25% |
| Tensile Strength: | 22 psi |
| Elongation Percent: | 140 |
| Thermal Conductivity: | 0.26 (k factor) |
| Service Temperature: | -40 to 180 |
| Application Temperature: | 50 to 110 |

* Information shown as a guide only and should not be used as specification data.

PVC Foam Cast-on 83# White Paper

| Stock No. | Thickness x Width | Length | Color | Carton |
|-----------|-------------------|--------|-------|--------|
| TP750B | .188" x .750" | 30' | Black | 40 |
| TP100B | .188" x 1.00" | 30' | Black | 32 |
| TP125B | .188" x 1.25" | 30' | Black | 24 |
| TP150B | .188" x 1.50" | 30' | Black | 20 |
| TP200B | .188" x 2.00" | 30' | Black | 16 |
| TP250B | .188" x 2.50" | 30' | Black | 12 |

PVC Foam Cast-on 1.5 mil Polyester Film

| | | | | |
|--------------|----------------|-------|---------------|----|
| TM100B | .188" x 1.00" | 30' | Black/PE Film | 32 |
| TM125B | .188" x 1.25" | 30' | Black/PE Film | 24 |
| TM150B | .188" x 1.50" | 30' | Black/PE Film | 20 |
| TM200B | .188" x 2.00" | 30' | Black/PE Film | 16 |
| TM250B | .188" x 2.50" | 30' | Black/PE Film | 12 |
| TMV615042812 | .250" x 1.875" | 12.5' | Black/PE Film | 16 |
| TMV6150428 | .250" x 2.50" | 16' | Black/PE Film | 15 |
| TMV61504283 | .250" x 2.50" | 3.33' | Black/PE Film | 72 |
| TMV6150608V | .375" x .500" | 30' | Black/PE Film | 48 |



Rolls may contain usable splices.

Light Density Vinyl Foam Tape

Series TPV7100 general purpose foam tapes are light density closed-cell Polyvinyl Chloride product, cast-on 7 mil clay coated paper, manufactured for use as a positive seal for irregular surfaces and/or for creating a tight seal on radius curve applications. This light density foam compresses easily and offers conformability, strength and resilience. It also offers excellent resistance to oxidation, weather and fungi.

Typical Industry Applications Include:

- Automotive • Construction • Recreational Vehicle
- Consumer Electronics • Heating • Air Conditioning

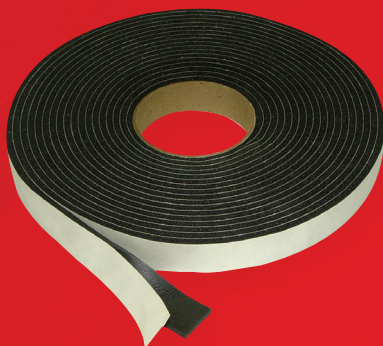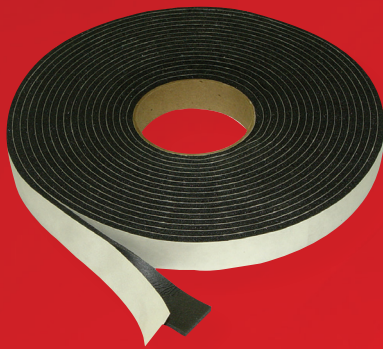

| | |
|--------------------------|------------------------------|
| Density and Hardness: | 7 lbs./cu.ft./ 14 (shore 00) |
| Compression Deflection: | .8 psi @ 25% |
| Compression Set: | 4 @ 25% |
| Tensile Strength: | 25 psi. |
| Elongation Percent: | 150 |
| Thermal Conductivity: | 0.27 (k factor) |
| Service Temperature: | -40 to 180 |
| Application Temperature: | 50 to 110 |


* Information shown as a guide only and should not be used as specification data.

Rolls may contain usable splices.

PVC Foam Cast-on Paper

| Stock No. | Thickness x Width | Length | Color | Carton |
|------------|-------------------|--------|-------|--------|
| TPV7100208 | .125" x .500" | 75' | Black | 48 |
| TPV7100210 | .125" x .625" | 75' | Black | 38 |
| TPV7100212 | .125" x .750" | 75" | Black | 32 |
| TPV7100216 | .125" x 1.00" | 75' | Black | 24 |
| TPV7100306 | .188" x .375" | 50' | Black | 64 |
| TPV7100308 | .188" x .500" | 50' | Black | 48 |
| TPV7100310 | .188" x .625" | 50' | Black | 38 |
| TPV7100312 | .188" x .750" | 50' | Black | 32 |
| TPV7100316 | .188" x 1.00" | 50' | Black | 24 |
| TPV7100324 | .188" x 1.50" | 50' | Black | 16 |
| TPV7100332 | .188" x 2.00" | 50' | Black | 12 |
| TPV7100404 | .250" x .250" | 35' | Black | 96 |
| TPV7100408 | .250" x .500" | 35' | Black | 48 |
| TPV7100410 | .250" x .625" | 35' | Black | 38 |
| TPV7100412 | .250" x .750" | 35' | Black | 32 |
| TPV7100416 | .250" x 1.00" | 35' | Black | 24 |
| TPV7100420 | .250" x 1.250" | 35' | Black | 18 |

Ask us about our "LD" Series, a great option for applications that do not require to be automotive certified. This cost effective closed cell PVC material is generally used to seal, cushion,insulate, and dampen vibration in a variety of applications. All PVC tapes come with a standard PSA unless otherwise specified or requested.




DIE CUTS

Die-cutting provides that next level of finished aesthetics while providing air-tight and water-tight seals to your application. LaVanture has 'in stock' die cuts and we have them to help you design a custom die cut seal. These parts are available with or without adhesive, individual pieces, or kiss-cut on a roll. Contact your Account Manager today!



PVC FOAM SEALING TAPES

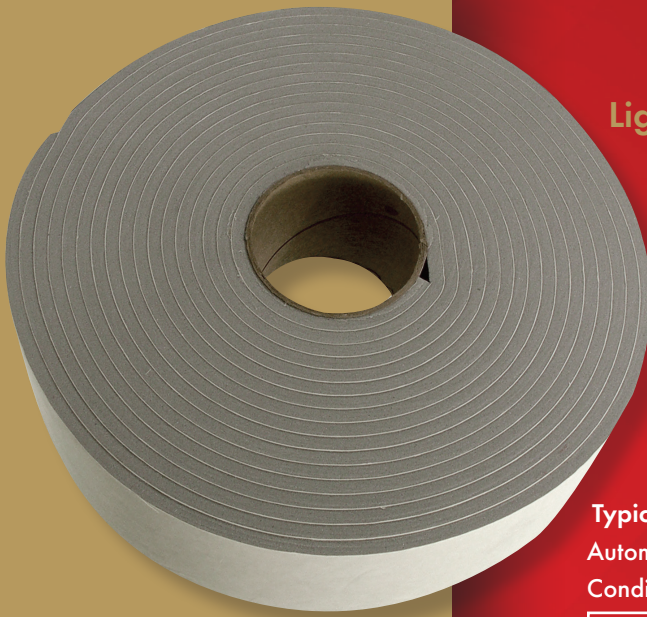

Light Density Vinyl Foam Tape

Series TPV8100 and TMV8150 general purpose foam tapes are light density closed-cell Polyvinyl Chloride products. TPV8100 is cast-on 5 mil kraft 83# paper and TMV8150 is cast-on 1.5 mil polyester film to provide dimensional stability. Both are manufactured for use as a positive seals for irregular surfaces or for creating a tight seal on radius curve applications. This light density foam compresses easily, offers conformity, strength, and resilience. It creates a life long seal against air, moisture, light, and dust penetration.

Typical Industry Applications Include:

Automotive • Construction • Recreational Vehicle • Heating • Air Conditioning • Marine

Physical Properties *

| | |
|--------------------------|-----------------------------|
| Density and Hardness: | 8 lbs./cu.ft./25 (shore 00) |
| Compression Deflection: | 2 psi @ 25% |
| Compression Set: | 4 @ 25% |
| Tensile Strength: | 30 psi. |
| Elongation Percent: | 150 |
| Thermal Conductivity: | 0.27 (k factor) |
| Service Temperature: | -40 to 180 |
| Application Temperature: | 50 to 110 |

* Information shown as a guide only and should not be used as specification data.

PVC Foam Cast-on Paper

| Stock No. | Thickness x Width | Length | Color | Carton |
|---------------|-------------------|--------|-------------|--------|
| TPV8100204 | .125" x .250" | 75' | Gray | 96 |
| TPV8100206 | .125" x .375" | 75' | Gray | 64 |
| TPV8100208 | .125" x .500" | 75' | Gray | 48 |
| TPV8100212 | .125" x .750" | 75' | Gray | 32 |
| TPV8100216 | .125" x 1.00" | 75' | Gray | 24 |
| TPV8100312 | .188" x .750" | 50' | Gray | 32 |
| TPV8100408 | .250" x .500" | 35' | Gray | 48 |
| TPV8100412 | .250" x .750" | 35' | Gray | 32 |
| TPV8100424-PW | .250" x 1.50" | 35' | Polar White | 16 |
| TPV8100612 | .375" x .750" | 30' | Gray | 32 |
| TPV8100808 | .500" x .500" | 25' | Gray | 48 |
| TPV8100816 | .500" x 1.00" | 25' | Gray | 24 |
| TPV8100832 | .500" x 2.00" | 25' | Gray | 12 |

PVC Foam Cast-on Film


| | | | | |
|-------------|---------------|-----|------|----|
| TMV8150212 | .125" x .750" | 75' | Gray | 32 |
| TMV8150216 | .125" x 1.00" | 75' | Gray | 24 |
| TMV8150240 | .125" x 2.50" | 75' | Gray | 8 |
| TMV8150408V | .250" x .500" | 35' | Gray | 48 |
| TMV8150412 | .250" x .750" | 35' | Gray | 32 |
| TMV8150416 | .250" x 1.00" | 35' | Gray | 24 |
| TMV8150616 | .375" x 1.00" | 30' | Gray | 24 |

Custom Sizes Available

AVAILABILITY:

All PVC foam tapes come standard with Pressure Sensitive Adhesive (PSA). Additional adhesive options are available upon request. Contact your account manager for more details.

Rolls may contain usable splices.

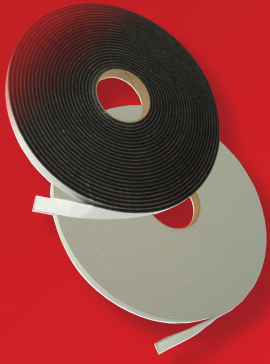

Medium Density Vinyl Foam Tape

Series TPV1100 and TPV1500 foam tapes are medium density closed-cell Polyvinyl Chloride products. Both are cast-on 5 mil kraft 80# calendared paper for use as a "heavy duty" seal where strength and wear resistance are required. This medium density foam tape absorbs shocks, deadens sound, cushions, and limits excess vibration.

Typical Industry Applications Include:

- Automotive • Construction • Recreational Vehicle
- Heating • Air Conditioning



Physical Properties *

| | TPV1100 Series | TPV1500 Series |
|--------------------------|------------------------------|-----------------------------|
| Density and Hardness: | 11 lbs./cu.ft./28 (shore 00) | 15 lbs./cu.ft./40(shore 00) |
| Compression Deflection: | 5 psi @ 25% | 7 psi @ 25% |
| Compression Set: | 17 @ 25% | 8 @ 25% |
| Tensile Strength: | 50 psi. | 80 psi. |
| Elongation Percent: | 130 | 160 |
| Thermal Conductivity: | 0.28 (k factor) | 0.30 (k factor) |
| Service Temperature: | -30 to -120 | -30 to -200 |
| Application Temperature: | 50 to -110 | 50 to -110 |

* Information shown as a guide only and should not be used as specification data.

PVC FOAM SEALING TAPES

PVC Foam Cast-on Paper


| Stock No. | Thickness x Width | Length | Color | Carton |
|-------------|-------------------|--------|-------|--------|
| TPV11100104 | .063" x .250" | 150' | Gray | 96 |
| TPV11100108 | .063" x .500" | 150' | Gray | 48 |
| TPV11100116 | .063" x 1.00" | 150' | Gray | 24 |
| TPV11100208 | .125" x .500" | 75' | Gray | 48 |
| TPV15100112 | .063" x .750" | 150' | Black | 32 |
| TPV1510SA | .125" x .250" | 75' | Black | 96 |
| TPV15100206 | .125" x .375" | 75' | Black | 64 |
| TPV15100208 | .125" x .500" | 75' | Black | 48 |
| TPV15100212 | .125" x .750" | 75' | Black | 32 |
| TPV15100203 | .125" x 3.00" | 75' | Black | 8 |
| TPV15100312 | .188" x .750" | 50' | Black | 32 |
| TPV15100320 | .188" x 1.25" | 50' | Black | 18 |
| TPV15100372 | .188" x 4.50" | 50' | Black | 12 |
| TPV15100408 | .250" x .500" | 35' | Black | 48 |
| TPV15100412 | .250" x .750" | 35' | Black | 32 |
| TPV15100416 | .250" x 1.00" | 35' | Black | 24 |
| TPV15100432 | .250" x 2.00" | 35' | Black | 12 |
| TPV15100608 | .375" x .500" | 30' | Black | 48 |
| TPV15100648 | .375" x 3.00" | 30' | Black | 8 |

Custom Sizes Available

Rolls may contain usable splices.

AVAILABILITY:

All PVC foam tapes come standard with Pressure Sensitive Adhesive (PSA). Additional adhesive options are available upon request. Contact your account manager for more details.

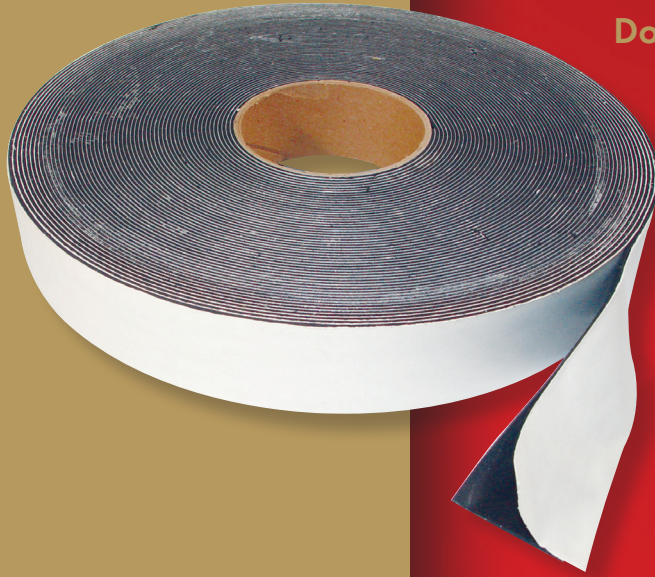

Double Face Vinyl Glazing Tape

TPV1520 Series is a medium density closed-cell Polyvinyl Chloride foam coated on both sides with an aggressive, pressure-sensitive adhesive, and an 84# polycoated two-side brown kraft liner.

TPV2500 Series Heavy Density Vinyl Foam Tape

TPV2500 Series is a heavy density closed-cell Polyvinyl Chloride foam. Designed for use in the most demanding foam sealing or cushioning applications. High internal strength resists pressure from outside forces and high hardness resists deterioration.

Typical Industry Applications Include:

- Automotive • Construction • Recreational Vehicle
- Heating • Air Conditioning • Marine

Physical Properties*

| | TPV1520 Series | TPV2500 Series |
|--------------------------|-----------------------------|-----------------------------|
| Density and Hardness: | 15 lbs./cu.ft./40(shore 00) | 25 lbs./cu.ft./58(shore 00) |
| Compression Deflection: | 7 psi @ 25% | 14 psi @ 25% |
| Compression Set: | 8 @ 25% | 6 @ 25% |
| Tensile Strength: | 80 psi. | 130 psi. |
| Elongation Percent: | 60 | 110 |
| Thermal Conductivity: | 0.30 (k factor) | 0.33 (k factor) |
| Service Temperature: | -30 to -200 | -40 to -180 |
| Application Temperature: | 50 to -110 | 50 to -110 |

* Information shown as a guide only and should not be used as specification data.

PVC Foam Double Sided Adhesive

| Stock No. | Thickness x Width | Length | Color | Carton |
|-------------|-------------------|--------|-------|--------|
| TPV15200108 | .063" x .500" | 150' | Black | 48 |
| TPV15200112 | .063" x .750" | 150' | Black | 32 |
| TPV15200116 | .063" x 1.00" | 150' | Black | 24 |
| TPV15200424 | .250" x 1.50" | 35' | Black | 16 |

PVC Foam Cast-on Paper

| Stock No. | Thickness x Width | Length | Color | Carton |
|-------------|-------------------|--------|-------|--------|
| TPV25100016 | .031" x 1.00" | 150' | Black | 12 |
| TPV2510024 | .063" x 1.50" | 100' | Black | 8 |

Custom Sizes Available

Rolls may contain usable splices.



Foam Tapes and Bumpers

Foam Tapes and Bumpers offer protection for a variety of things including cabinet doors, cutting boards, appliances where quiet protection from nicks is desired.

Separator/Shipping Foam Pads provide glass protection during shipment. Ideal for transporting, packing, storage and installation of finished and unfinished glass doors, windows and mirrors.


Polyether Tape is a flexible fine cell foam tape designed for automotive gasketing applications, especially for RV doors. The high-tack permanent rubber-based pressure sensitive adhesive exhibits a superior balance of tack, peel and holding power on a wide variety of surfaces.

Polyethylene Foam Tape is single-coated cross-linked closed cell with rubber-based pressure sensitive adhesive with high tack and high shear.

Neoprene Tape is a closed cell EPDM/SBR blend tape featuring a high tack rubber based adhesive with liner on one side.

PVC Foam Tapes are cost effective solutions for sealing out light, air, dust and moisture, and cushions against vibration and noise.

Polyester Urethane Foam is highly flexible, fine cell, fully clickable foam that is uniform and breathable without voids or tears.



See our Hardware catalog for cabinet bumpers.

SPECIALTY FOAM TAPES

| Foam Tapes and Bumpers | | | | |
|------------------------|-------------------|--------|-------|------------|
| Stock No. | Thickness x Width | Length | Color | Carton Qty |
| TPEV25375 | .25" x .375" | 50' | Black | 48 |
| TPER10075 | 1" X .75" | 25' | Gray | 24 |
| TPER12510 | 1.25" x 1" | 25' | Gray | 18 |
| TPER125250PW | .125"X .25" | 75' | White | 71 |
| TPER125975PW | .125" X 9.75" | 75' | White | 6 |
| TPER18750 | .1875"x .75" | 100' | White | 18 |
| TPER25500 | .25" x .50" | 50' | White | 36 |
| TPER37520 | .375" x 2" | 50' | White | 9 |
| TPER37550 | .375" x .50" | 1000' | Gray | 8 |
| TPER426252PB | .0625"x 2" | 108' | Black | 12 |
| TPER5350PB | .50" x 3" | 25' | Black | 6 |
| TPER8212125 | .125" x 1" | 225' | Gray | 18 |
| TPER821250 | .125" x 50" | 75' | Gray | 36 |
| TPER845075 | .50" x .75" | 25' | Gray | 24 |
| TPER8511ST | 1" x 1" | 25' | Black | 18 |
| TPER8550ST | .50" x .50" | 50' | Black | 36 |
| TPER8575ST | .75" x .75" | 25' | Black | 24 |

A wide variety of additional products are also available. Please call for information. Rolls may contain usable splices.

LPC Foam tapes provide excellent bonding and barrier properties. Ideal for gasketing, sealing, cushioning, mounting and insulating in a wide range of industries, including HVAC, automotive, OEM assembly applications, and window manufacturing.



Polyolefin Glazing Tapes

Our Polyethylene Series are high performance closed-cell, cross linked polyolefin foam tapes, coated on both sides with a lightly aggressive acrylic pressure sensitive adhesive, that adheres well to a wide variety of surfaces. Great for sealing, cushioning, thermal insulations, sound deadening, and excessive vibration applications.

"TEI" Series is a low cost option that is used in popular applications like shower, mirror, exterior diecut gaskets, and other light duty mounting and general purpose applications.

DIE CUTS: Die-cutting provides that next level of finished aesthetics while providing air-tight and water-tight seals to your application. LaVanture has 'in stock' die cuts and we have them to help you design a custom die cut seal. These parts are available with or without adhesive, individual pieces or kiss-cut on a roll. Contact your Account Manager today!

Polyolefin Tape Single Sided Adhesive

| Stock No. | Thickness x Width | Length | Color | Carton Qty |
|--------------|-------------------|--------|-------|------------|
| TEI21012575 | .125" X .750" | 75' | White | 32 |
| TEI21012575B | .125" X .750" | 75' | Black | 32 |
| TEI2102550A | .250" X .500" | 50' | Black | 12 |
| TEI2102510A | .250" X 1.00" | 50' | Black | 24 |
| TEI21025143 | .250" X 1.438" | 50' | Black | 16 |
| TEI2102516 | .250" X 1.625" | 50' | Black | 16 |
| TEI210252 | .250" X 2.00" | 50' | Black | 12 |

Polyolefin Glazing Tape Double Sided Adhesive

| | | | | |
|-------------|---------------|------|-------|----|
| TEI6260315 | .031" X .500" | 216' | Black | 48 |
| TEI4206350A | .063" X .500" | 108' | White | 48 |
| TEI4206375A | .063" X .750" | 108' | White | 32 |
| TEI4206310A | .063" X 1.00" | 108' | White | 24 |
| TEI4201500 | .063" X 1.50" | 108' | White | 16 |
| TEI2201257 | .125" X .750" | 75' | White | 32 |
| TEI2201251 | .125" X 1.00" | 75' | White | 24 |

Polyolefin Die Cuts Single Sided Adhesive

| Stock No. | Size | Color | Carton Qty |
|----------------|-------------------------|-------|------------|
| TEI21025-1.56 | .250" X 2.312" X 1.562" | Black | 2160 |
| TEI21025-12X5 | .250" X 12.375" X 5.75" | Black | 100 |
| TEI21025-2.25 | .250" X 2.25" OD | Black | 4000 |
| TEI21025-7X3 | .250" X 7.5" X 3.25" | Black | 400 |
| TEI21025-2.438 | .250" X 2.438" OD | Black | 2000 |
| TEI20150-4X2* | .500" X 3.83" X 1.84" | Black | 910 |

*No Adhesive
Rolls may contain usable splices




High Bond Tapes

LaVanture Products offers the latest in Very High Bond and we represent the manufacturers, such as Gaska Tape Hi Bond Adhesive System (GHB), HB Fuller's High Bond Acrylic Tapes, or 3M VHB. All bring something unique to the table, whether it be an impregnated foam core or a solid acrylic tape, in an effort to increase production and ease of installation.

In most cases they will replace mechanical fasteners, UV stable, wide range of temperatures, vibration resistant, and are corrosion resistant.

Contact your Account Manager to help navigate through our extensive options.

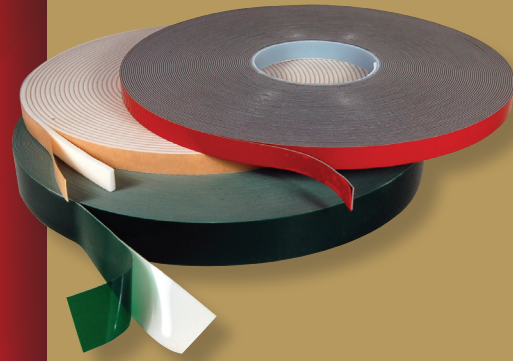

GHB Hi-Bond Tapes

| Stock No. | Thickness x Width | Length | Color | Carton Qty |
|---------------|-------------------|--------|-------|------------|
| THB40201185 | .118" X .500" | 54' | White | 24 |
| THB402625375 | .025" X .375" | 216' | White | 16 |
| THB402625750 | .025" X .750" | 216' | White | 16 |
| THB402602510 | .025" X 1.00" | 216' | White | 12 |
| THB40262520 | .025" X 2.00" | 216' | White | 12 |
| THB40264575 | .045" X .750" | 108' | White | 16 |
| THB40264510 | .045" X 1.00" | 108' | White | 12 |
| THB40260850 | .080" X .500" | 54' | White | 24 |
| THB4026080 | .080" X .750" | 54' | White | 16 |
| THB40260801A | .080" X 1.00" | 54' | White | 24 |
| THB40260815A | .080" X 1.50" | 54' | White | 16 |
| THB452602575B | .025" X .750" | 216' | Black | 32 |
| THB45260455 | .045" X .500" | 108' | Black | 24 |
| THB45260451B | .045" X 1.00" | 108' | Black | 12 |
| THB45260631 | .063" X 1.00" | 108' | Black | 12 |
| THB46260901G | .090" X 1.00" | 108' | Gray | 12 |
| THB4720950 | .090" X .500" | 108' | Gray | 24 |
| THB66260250 | .020" X .500" | 216' | Clear | 24 |

HB Fuller | ADCO | Royal

| Stock No. | Thickness x Width | Length | Color | Carton Qty |
|-------------|-------------------|--------|-------------|------------|
| LAT2045-500 | .045" X .500" | 108' | Gray | 18 |
| LAT3045-500 | .045" X .500" | 108' | Transparent | 18 |
| LAT3045-1 | .045" X 1.00" | 108' | Transparent | 9 |
| LAT3060-1 | .060" X 1" | 108' | Transparent | 9 |
| LAT3080-1 | .080" X 1" | 54' | Transparent | 9 |

3M

| Stock No. | Thickness x Width | Length | Color | Carton Qty |
|-----------|-------------------|--------|-------|------------|
| CHB461834 | .025" X .750" | 216' | White | 12 |
| CHB462212 | .045" X .500" | 108' | White | 18 |
| CHB46221 | .045" X 1.00" | 108' | White | 9 |

HI-BOND TAPES



Available in 1 gallon and 5 gallon cans.

Butyl Sealants

These sealants are a butyl rubber, general -purpose product formulated from a blend of butyl rubber and polyisobutylene.



Butyl Tape

LaVanture Products distributes only high quality preformed butyl tape from the industries leading manufacturers. All tape is 100% cross-linked butyl that prevents galvanic corrosion, adheres to a variety of substrates and are In-Stock for Immediate Shipment at Factory Direct Prices Custom Sizes Available. Please contact us for information and pricing.

POLYshim II Tape is a 100% solid, highly adhesive and elastic, cross linked butyl preformed tape with a continuous integral EPDM shim.

TremPro 651

TremPro 651 is specially designed for use in lower movement joints typically found in truck trailers and cabs, shipping containers, bus bodies, modular homes, and railroad cars. The product is a weather resistant exterior grade sealant that has excellent adhesion to wood, metal, glass, concrete, and masonry surfaces. TremPro 651 is a very economical and flexible general purpose sealant.

| TremPro 651 | | | | |
|-------------|------------------------|---------------|-------|------------|
| Stock No. | Description | Size | Color | Carton Qty |
| T651 BSL | Exterior Grade Sealant | 20 oz Sausage | Black | 15 |
| T651 GSL | Exterior Grade Sealant | 20 oz Sausage | Gray | 15 |

Butyl Tape

TNG Series Butyl Tape is a 100% solid cross linked butyl, a preformed sealant used for lap sealing. It adheres tenaciously to a wide variety of substrates including steel, aluminum, and porcelain. It effectively seals dissimilar metals while preventing their contact that could cause galvanic corrosion. It is extruded on silicone coated paper for easy application. It is produced in many different sizes and lengths to fit all application requirements. Applications include truck trailers, cabs, bus bodies, recreational vehicles, and modular homes.

LBT Series Butyl Tape is a elastomeric butyl rubber sealant designed to meet the critical requirements of metal buildings. It also meets or exceeds all sealing requirements for window glazing, air conditioning, and refrigeration. It is extruded on silicone coated paper for easy application. It is produced in many different sizes and lengths to fit all application requirements.

LAS30A and LBC series are butyl coated foam tapes and they offers the sealing power of butyl with the flexibility of foam tape. These are economical and production friendly and a great alternative to standard butyl tapes.

| Butyl Tape | | | | |
|-------------|-------------------|--------|-------|------------|
| Stock No. | Thickness x Width | Length | Color | Carton Qty |
| TNG3212 | .094" x .500" | 50' | Gray | 20 |
| LBT33234W | .094" x .750" | 30' | White | 24 |
| TNG3321 | .094" x 1.00" | 50' | Gray | 20 |
| TNG332112 | .094" x 1.50" | 50' | Gray | 8 |
| LBT332112W | .094" x 1.50" | 40' | White | 12 |
| TNG1812 | .125" x .500" | 40' | Gray | 20 |
| TNG1812BK | .125" x .500" | 40' | Black | 20 |
| TNG1834 | .125" x .750" | 50' | Gray | 12 |
| LBT1834W | .125" x .750" | 50' | White | 10 |
| LBT181W | .125" x 1.00" | 50' | White | 8 |
| TNG181 | .125" x 1.00" | 40' | Gray | 12 |
| LBT18112W | .125" x 1.50" | 30' | White | 12 |
| TNG31612BLK | .188" x .500" | 30' | Black | 18 |
| TNG1414BK | .250" x .188" | 25' | Black | 48 |
| TNG14316 | .250" x .188" | 25' | Gray | 48 |
| LBT1434W | .250" x .750" | 20' | White | 24 |
| LAS30A-250 | .250" DIA | 15' | Black | 12 |
| LAS30A-313 | .3125" DIA | 15' | Black | 12 |
| LAS30A-620 | .250" X .788" | 15' | Black | 14 |
| LBC1101 | .375" DIA | 35' | Black | 20 |

| Polyshim EPDM Tape | | | | |
|--------------------|-------------------|--------|-------|------------|
| Stock No. | Thickness x Width | Length | Color | Carton Qty |
| S17DDV1760 | .125" x .750" | 40' | Black | 12 |
| S17DEP1760 | .125" x 1.50" | 35' | Black | 6 |

| LB 100 Butyl Rub Seal | | | | |
|-----------------------|-----------------------|-------|-----------------|------------|
| Stock No. | Description | Color | Size | Carton Qty |
| LB-100 | Butyl Rubber Skinning | Black | 10 oz Cartridge | 30 |
| LBR900BSSG | Butyl Rubber Skinning | Black | 20 oz Cartridge | 20 |



Automotive Special Applications Weather Seals

LaVanture EPDM rubber speciality seals are designed for special applications where exposure to weather, water, electricity, light, and human contact is involved.

EPDM is a highly stable polymer closed cell sponge material that will not absorb or hold moisture and is not effected by temperature extremes. EPDM also exhibits high electrical insulative properties, unlike most elastomers it exhibits superior UV resistance.

Specifications:


Most LaVanture EPDM rubber seals are medium density, 45-50 durometer. A small selection are dense, 65-70 durometer. These dense durometer seals are coded DD. Standard RMA tolerances apply to all the EPDM rubber seals.

Adhesives:


Adhesives are available for a wide variety of applications in either Heat Activated Tape System (HATS) or Pressure Sensitive Adhesive (PSA). Both options have been tested and have passed our rigid performance requirements.

| EPDM Specialty Seals | | | | | |
|----------------------|-------------------------|-------------------|-------|----------|------------|
| Stock No. | Description | Width x Thickness | Color | Adhesive | Carton Qty |
| LP2123-H | Triangle Seal, Hollow | .625" x .625" | Black | HATS | 250' |
| LP2730 | L Seal DD | 2.00" x 1.125" | Black | None | 200' |
| LP2028 | Trim Gasket 85 DD | 2.00" x 1.00" | Black | None | 500' |
| SP1596 | Self Seal Weather Strip | .250" x .125" | Black | None | 50' |
| SP0445 | Garage Door Seal | 0.150" x 1.00" | Black | None | 200' |
| SP2003 | Slide-Out Seal | 2.24" x 2.079" | Black | None | 100' |
| TPDV810316 | Gasket (cut pieces) | .188" x 6.875" | Gray | PSA | 1000 |


Custom Sizes Available



LP2730




LP2123-H




LP2028




SP1596



SP0445




SP2003



TPDV810316

Pre-cut light gasket seal for 6¾" Triplex Manufacturing tail light model #8505

SPECIALTY SEALS

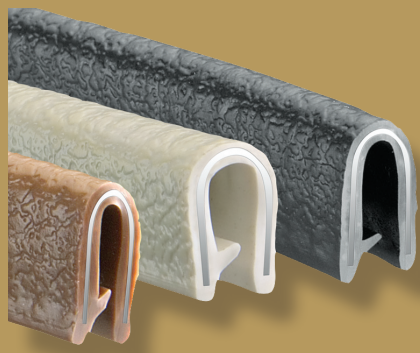

STANDARD EDGE TRIM



Standard Trim

Standard trim is a flexible PVC Trim with metal clips inside to provide a permanent grip.

Product Specifications:

Recommended temperature range for general applications is -20 degrees F. through +150 degrees F. Outer coating material is Vinyl (PVC) with a hardness of 80 durometer which encases the internal steel clip, preventing corrosion. Flammability and code compliance for Vinyl are: FMVSS 302 and FAA/FAR 25.853.

| Standard Trim | | | | |
|------------------------------|----------------|------------------|------------------|------------|
| Stock No. | Size | Color | Carton Qty | |
| TS75B-32 | 3/32" x 7/16" | Black | 250' | |
| TS750B5-6 | 1/16" x 7/16" | Black | 250' | |
| TS100B-6 | 1/16" x 9/16" | Black | 250' | |
| TS100T-6 | 1/16" x 9/16" | Tan | 250' | |
| TS100W-6 | 1/16" x 9/16" | White | 250' | |
| TS100B-8 | 1/8" x 9/16" | Black | 250' | |
| TS100B-8A | 1/8" x 9/16" | Black w/Adhesive | 250' | |
| TS100G-8 | 1/8" x 9/16" | Gray | 250' | |
| TS100W-8 | 1/8" x 9/16" | White | 250' | |
| TS100T-8 | 1/8" x 9/16" | Tan | 250' | |
| TS150B-8 | 1/8" x 9/16" | Black | 250' | |
| TS1375W-8 | 1/8" x 3/4" | White | 250' | |
| TS1375B-8 | 1/8" x 3/4" | Black | 250' | |
| TS100B-3 | 3/16" x 17/32" | Black | 250' | |
| TS100T-3 | 3/16" x 17/32" | Tan | 250' | |
| TS100W-3 | 3/16" x 17/32" | White | 250' | |
| TS150B-3 | 3/16" x 17/32" | Black | 250' | |
| TS1100B-3 | 3/16" x 9/16" | Black | 250' | |
| TS1375B-3 | 3/16" x 3/4" | Black | 250' | |
| TS1375W-3 | 3/16" x 3/4" | White | 250' | |
| TS100B-4 | 1/4" x 1/2" | Black | 250' | |
| TS1350B-4 | 1/4" x 11/16" | Black | 250' | |
| TS1350G-5 | 5/16" x 11/16" | Gray | 250' | |
| TS1375B-2 | 1/2" x 3/4" | Black | 250' | |
| Standard Trim with Bulb Seal | | | | |
| Stock No. | Size | Color | Bulb Location Sz | Carton Qty |
| TSB1300C-6 | 1/16" | Black | Loc C – 3/8" | 250' |
| TSB1300A-6 | 1/16" | Black | Loc A – 3/8" | 250' |
| TSB1400A-6 | 1/16" | Black | Loc A – 7/16" | 250' |
| TSB1400AB-6 | 1/16" | Black | Loc AB – 7/16" | 250' |
| TSB1600AB-6 | 1/16" | Black | Loc AB – 5/8" | 250' |
| TSB1700A-6 | 1/16" | Black | Loc A – 3/4" | 250' |
| TSB1300C-8 | 1/8" | Black | Loc C – 3/8" | 250' |
| TSB1400AB-8 | 1/8" | Black | Loc AB – 7/16" | 250' |
| TSB1400C-8 | 1/8" | Black | Loc C – 7/16" | 250' |
| TSB1600C-8 | 1/8" | Black | Loc C – 5/8" | 250' |
| TSB1600DE-8 | 1/8" | Black | Loc DE – 5/8" | 250' |
| TSB1700A-8 | 1/8" | Black | Loc A – 3/4" | 250' |
| TSB1400C-3 | 3/16" | Black | Loc C – 7/16" | 250' |
| TSB1600AB-3 | 3/16" | Black | Loc AB – 5/8" | 250' |
| TSB1700AB-4 | 1/4" | Black | Loc AB – 3/4" | 250' |
| TSB1700C-3 | 3/16" | Black | Loc C- 3/4" | 250' |
| Custom Sizes Available | | | | |



Bulb Trim

Bulb trim is a flexible PVC trim with a sponge rubber tubing Co-extruded to provide a secure seal for a variety of applications.

Applications Include:

- Auto Trunks • Boat Hatches • Car Hoods
- Golf Carts • Tool Boxes • Truck Caps
- RV Compartments • Doors • Utility Vehicles
- Vehicle Doors • and Many Others


Product Specification:

Recommended temperature range for general applications is -20 degrees F. through +150 degrees F. Outer coating material is vinyl (PVC), hardness 80 durometer. Excellent Resistance to Water, Ozone, Sunlight, Low Temperatures and Compression Set. Flammability and code compliance for vinyl are FMVSS 302 and FAA/FAR 25.853.

Typical Applications*
 For optimum performance – 25% maximum compression recommended


Bulb Sizes Available
 (Black bulb only, outside dimensions)

| | | | |
|--------------|--------------|--------------|--------------|
| | | | |
| 3/8 | 7/16 | 5/8 | 3/4 |
| SERIES: 1300 | SERIES: 1400 | SERIES: 1600 | SERIES: 1700 |

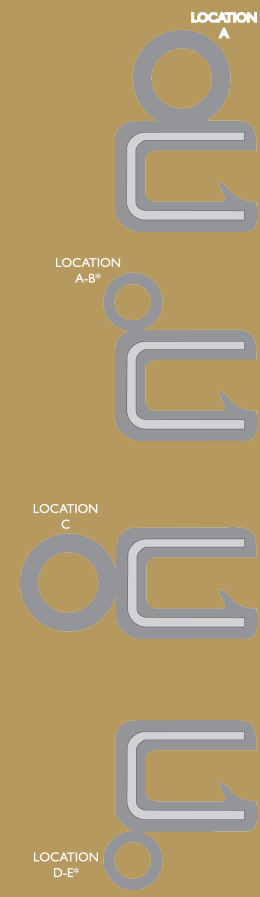

*Nonstandard location, special order

STANDARD EDGE TRIM

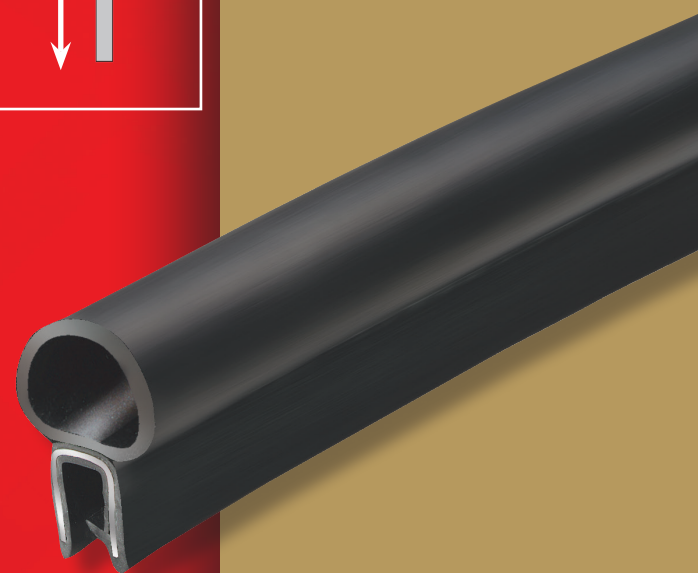



Tremsil 200

Product Description: Tremsil 200 is a one-part, acetoxy silicone sealant that cures to a flexible rubber silicone when exposed to moisture present in the air.

Basic Uses: Tremsil 200 is specially designed for sealing joints between most non-porous materials such as glass, aluminum, metal and metal alloys. Applications include railroad cars, recreational vehicles, truck trailers and cabs. Industrial and residential uses include HVAC, plumbing and kitchen/bath fixtures. Tremsil 200 may also be used on site where a gun grade sealant is required. It is easily gunnable over a wide range of temperatures and has excellent adhesion to most common substrates without the use of a primer.


| Tremsil 200 | | Custom Colors NOT Available | |
|-------------|-------------------|-----------------------------|------------|
| Stock No. | Size | Color | Carton Qty |
| T200A | 10.1 oz Cartridge | Aluminum | 30 |
| T200B | 10.1 oz Cartridge | Black | 30 |
| T200C | 10.1 oz Cartridge | Clear | 30 |
| T200CW | 10.1 oz Cartridge | Ivory | 30 |
| T200W | 10.1 oz Cartridge | White | 30 |

Tremsil 600

Product Descriptions: Tremsil 600 is a single component, medium modulus, neutral cure silicone sealant. Tremsil 600 cures to a flexible rubber silicone when exposed to moisture present in the air.

Basic Uses: Tremsil 600 is specially designed for sealing joints between most non-porous materials such as glass, aluminum, metal and metal alloys. Typical applications include: recreational vehicles, truck trailers and cabs. Tremsil 600 is easily gunnable over a wide range of temperatures and has excellent adhesion to most common substrates without the use of a primer. The product also has superior handling and tooling characteristics when compared to other silicones. Tremsil 600 has superior skin time, excellent ultraviolet resistance and movement capabilities. Tremsil 600 is ideal for OEM and production line applications.

| Tremsil 600 | | | |
|-------------------------|-------------------|-------------|------------|
| Stock No. | Size | Color | Carton Qty |
| TH600A | 10.1 oz Cartridge | Aluminum | 30 |
| TH600B | 10.1 oz Cartridge | Black | 30 |
| TH600C | 10.1 oz Cartridge | Translucent | 30 |
| TH600CW | 10.1 oz Cartridge | Col White | 30 |
| TH600DT | 10.1 oz Cartridge | Dark Tan | 30 |
| TH600G | 10.1 oz Cartridge | Gray | 30 |
| TH600LO | 10.1 oz Cartridge | Light Oak | 30 |
| TH600LT | 10.1 oz Cartridge | Light Tan | 30 |
| TH600TB | 10.1 oz Cartridge | Beige | 30 |
| TH600W | 10.1 oz Cartridge | White | 30 |
| TH600IV | 10.1 oz Cartridge | Ivory | 30 |
| TH600ET | 10.1 oz Cartridge | Earthtone | 30 |
| TH600CL | 10.1 oz Cartridge | Clear | 30 |
| TH600MW | 10.1 oz Cartridge | Martin Wood | 30 |
| Custom Colors Available | | | |

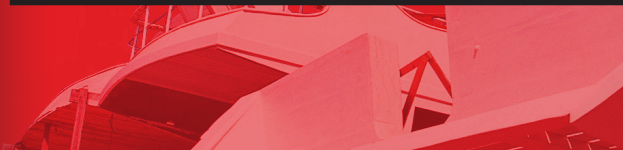



LaVanture Products has been providing quality sealant solutions for over 40 years and in an effort to expand our capabilities we have added these economical Series LS100 and LS150 to supplement our line of quality sealants. LS Series products are Made in the USA and are economically priced.

LS100

Product Description: LS100 is a one component, permanently flexible, RTV Mildew resistant silicone sealant. Manufactured for excellent adhesion to cultured marble, tile, glass, vinyl, aluminum, and sheet metal without the need of a primer and cures rapidly, when exposed to atmospheric moisture to form a durable tight bond. It is approved for cultured marble and window & door applications with excellent adhesion to glass, non-sag & slump, 50 year durability, quick curing, consistent gunability & tooling.

Basic Uses: Cultured Marble Applications, Window & Door Applications, Glass Replacement, Kitchen & Bath, Industrial Applications.



| LS100 | | | |
|-----------|-------------------|----------|------------|
| Stock No. | Size | Color | Carton Qty |
| LS100A | 10.1 oz Cartridge | Aluminum | 24 |
| LS100B | 10.1 oz Cartridge | Black | 24 |
| LS100C | 10.1 oz Cartridge | Clear | 24 |
| LS100W | 10.1 oz Cartridge | White | 24 |
| LS100G | 10.1 oz Cartridge | Gray | 24 |
| LS100KA | 10.1 oz Cartridge | Khaki | 24 |


LS150

Product Description: LS150 is a one component, non sag, permanently flexible neutral cure silicone sealant. Manufactured for excellent adhesion to vinyl, glass, aluminum, wood, sheet metal and most common building materials without the need of a primer and cures rapidly when exposed to atmospheric moisture to form a durable tight bond. It is AAMA and window & door approved with excellent adhesion to glass, non-sag & slump, 75 year durability, quick curing, excellent UV resistance, non-yellowing and consistent gunability & tooling.

Basic Uses: Window & Door Applications, Glass Replacement, Industrial Applications, Copper Sheet Metal Applications interior walls, ceilings and floors to reduce Sound Transmission Class (STC) of partition walls.



| LS150 | | | |
|-----------|-------------------|------------|------------|
| Stock No. | Size | Color | Carton Qty |
| LS150W | 10.1 oz Cartridge | White | 24 |
| LS150VP | 10.1 oz Cartridge | Vine Pearl | 24 |
| LS150B | 10.1 oz Cartridge | Black | 24 |



Custom Color Matching

Color matching is also available of virtually any color whether an industry standard or a custom color. Contact us for more information



SILICONE & ACRYLIC SEALANTS



Eco-Friendly Sealants

These Energy Efficient Sealant or “Green” series sealants are beneficial to the effect on the environment at two levels. First, by minimizing the adverse effects pollutants have on the environment. Secondly, increasing a building’s efficiency. Increasing a building’s efficiency is made possible by reducing the amount of heat loss (or intrusion) by sealing cracks, seams, and other openings.

The environmental effect reduction is made possible by our extremely low VOC (volatile organic compounds) levels. These “Green” products have VOC levels less than that required by the national standards.

Not only do the products listed here follow a “green” standard, they go beyond the obvious. For instance, the plastic cartridges that the sealants are filled in are made with post-recycled product, and we encourage our customers to follow a “recycling” program.

All Eco-Friendly “green” products are in stock and ready for immediate shipment.

LS25 Acrylic Latex Sealant

Product Description: LS25 is a premium grade multi-purpose siliconized acrylic latex sealant. Manufactured and Developed to provide excellent adhesion to vinyl, aluminum, wood, sheet metal and most common building materials without the need of a primer. It has been specially developed for the use in the installation of windows & doors and has minimal shrinkage. LS25 cures rapidly to form a durable tight bond.

Basic Use: Window & Door Applications, Cultured Marble, Tile and Industrial Applications



| LS25 | | | |
|-----------|-------------------|--------|------------|
| Stock No. | Size | Color | Carton Qty |
| LS25B | 10.1 oz Cartridge | Black | 24 |
| LS25C | 10.1 oz Cartridge | Clear | 24 |
| LS25W | 10.1 oz Cartridge | White | 24 |
| LS25AD | 10.1 oz Cartridge | Almond | 24 |

LFSB618 Expanding Foam Expanding 1-Part Energy Efficient Polyurethane Foam

LFSB6185 Expanding Foam is a multi-purpose, UL-classified, one-component polyurethane foam designed specifically for window and door installation and retro-fit applications. Apply Expanding Foam onto any clean surface to fill and seal around windows and door frame joints, beneath base plates, mud sills, top plate penetrations, corner joints, T-joints, exterior cracks, around utility panels, pipes and duct penetrations. A critical advantage of this industrial/construction grade foam is its extremely low pressure build while curing, which greatly reduces the chances of bowing.

LS Expanding Foam is designed within international guidelines for protection of the ozone layer and other environmental guidelines.

Applications: Seal Exterior Openings, HVAC/R, Plumbing, Roof, Insulation, Electrical, Transportation Seals, Marine Cabins, Appliance Trim & Parts



| LS500 | | |
|-------------|----------------------------------|------------|
| Stock No. | Description | Carton Qty |
| LFSB618 | Gray Expanding Polyurethane Foam | 12 |
| LGFS165-GUN | Expanding Polyurethane Foam Gun | 1 |



TremPro 655

Product Descriptions: TremPro 655 is a high performance, siliconized acrylic latex sealant formulated to provide a fast-setting pliable seal with minimal shrinkage.

Basic Uses: TremPro 655 is a general purpose sealant specially designed for OEM and production line applications requiring paint ability, fast skinning and low odor. Typical uses include: trailers, trucks, buses, modular homes, RV utility bodies, and shipping containers.

| TremPro 655 | | | |
|-------------|-------------------|----------|------------|
| Stock No. | Size | Color | Carton Qty |
| T655A | 10.1 oz Cartridge | Aluminum | 30 |
| T655T | 10.1 oz Cartridge | Tan | 30 |
| T655W | 10.1 oz Cartridge | White | 30 |

HB Fuller EternaCaulk

Product Descriptions: EternaCaulk, SolidSeal, and Silaprene are high performing multi-purpose products. Technologies ranging from a thermoplastic elastomer to a silicone free rubber-based adhesive/sealant. These products offer flexibility, great adhesion, easy to use, and are economical.


| HB Fuller | | | | |
|--------------|-----------------------|-----------------|-------|------------|
| Stock No. | Description | Size | Color | Carton Qty |
| LEB-EKPTC-BL | EternaCaulk | 10 oz Cartridge | Black | 12 |
| LEB-EKPTC-CL | EternaCaulk | 10 oz Cartridge | Clear | 12 |
| LEB-EKPTC-WH | EternaCaulk | 10 oz Cartridge | Black | 12 |
| LES810CSSG | EternaCaulk | 20 oz Sausage | Clear | 40 |
| LES900B | EternaCaulk | 10 oz Cartridge | Black | 24 |
| LES900C | EternaCaulk | 10 oz Cartridge | Black | 24 |
| LES900W | EternaCaulk | 10 oz Cartridge | White | 24 |
| LLS7030B-5 | Low Vic Sealant | 5 Gallon Pail | Black | 1 |
| RA12176W | Solid Seal | 10 oz Cartridge | White | 12 |
| RA12724GSSG | Silaprene Sealant | 20 oz Sausage | Gray | 20 |
| RA12742G | Nitrile Solvent Based | 5 Gal Pail | Amber | 1 |
| RA12781C | Haps Free Seal | 10 oz Cartridge | Clear | 24 |
| RA12788B | Haps Free Seal | 10 oz Cartridge | Black | 24 |
| RA13701G | Silaprene Adhesive | 10 oz Cartridge | Gray | 12 |

Cox guns are the market-leader in handheld sealant and adhesive dispensers. Whether you're looking for a manual gun, battery gun, or pneumatic gun, we have the right gun for you. Call your Account Manager today to assist you.

| Application Guns | | | |
|------------------|-----------------------------|----------|------------|
| Stock No. | Description | Size | Carton Qty |
| C2N1007 | White Cone Plastic Nozzle | STD | 100 |
| C41001 | #7 Wexford Steel Cart Gun | 10 oz | 1 |
| C41002 | Jumbo Quart Cart Gun | 29 oz | 1 |
| C51001 | Avon 15" Manual Sausage Gun | 20/10 oz | 1 |
| C5100CH-XT | Clear Sausage Avon Hook | 10 oz | 1 |
| C61001 | Tyne Cartridge Gun | 10 oz | 1 |
| C61006-20 | PHE Sausage Gun | 20 oz | 1 |



SILICONE & ACRYLIC SEALANTS



Custom Color Matching

Color matching is also available of virtually any color whether an industry standard or a custom color. Contact us for more information



LaVanture Products is the largest distributor of Tremco Products, supplying Cargo, Marine, and RV Industries.

ADHESIVES & SEALANTS



Polyurethane Sealants

LaVanture Products stocks and distributes a full line of quality sealants and butyl tapes from one of the leading manufacturer in the industry, Tremco Products, inc.

Tremco sealants represent over 100 years of product innovations making it the single source leader offering superior sealing solutions to the O.E.M. market. LaVanture markets a broad line of Tremco products including polyurethane, silicone, latex, organic polymer and cross linked butyl sealants to meet your industry's unique applications. Tremco products are available in cartridges, sausages and drums.

Sealants and foam tape products are all available for immediate shipment from LaVanture Products warehouses. Speciality products are also available to meet unique applications.

TremPro 626/636

Product Descriptions: Vulkem 626/636 is a high performance, medium modulus, moisture-curing polyurethane sealant for use on pre-engineered metal buildings (PEMBs), HVAC units and other industrial fabrications. It was formulated to provide a pliable seal against many common industrial building materials.

(Vulkem 636 is a smooth "non-textured" version of Vulkem 626)

Basic Uses: Vulkem 636 was designed to seal standing seam roof laps, wall joints, roof curbs, door and window perimeters, skylights, around fastener heads and various roof penetrations. In addition, Vulkem 636 offers exceptional adhesion to a variety of metal coatings, rigid PVC, fiber-reinforced polyester, anodized aluminum and galvanized and stainless steel.

TremPro 626/636

| Stock No. | Size | Color | Carton Qty |
|-----------|-------------------|----------|------------|
| V626A | 10.1 oz Cartridge | Aluminum | 30 |
| V626B | 10.1 oz Cartridge | Black | 30 |
| V626G | 10.1 oz Cartridge | Gray | 30 |
| V636GSL | 20.0 oz Sausage | Gray | 15 |

TremPro 635

Fast-Cure, Low-VOC, High Solids Polyurethane Sealant. TremPro 635 utilizes a solvent-free technology, which represents technical advances over existing polyurethane systems. In addition, TremPro 635 demonstrates excellent adhesion to a wide variety of substrates, including ferrous, non-ferrous metals, Kynar finishes, composite materials and many plastic and rubber substrates. High performance, low to medium modulus, one component, gun grade polyurethane sealant. The sealant cures to a flexible rubber when exposed to atmospheric moisture.

Basic Uses

TremPro 635 is specially designed for use a topical sealant in the fabrication of trailers, trucks, campers, buses, trains, and speciality vehicles. It can be used in joints and seams in architectural panels and pre-engineered buildings.

TremPro 635

| Stock No. | Size | Color | Carton Qty |
|-----------|-------------------|-------|------------|
| V635W | 10.1 oz Cartridge | White | 30 |
| V635G | 10.1 oz Cartridge | Gray | 30 |
| V635B | 10.1 oz Cartridge | Black | 30 |

TremPro 638 SSL

Product Description: Vulkem 638 SSL is a high performance, low modulus, one-component, semi-self leveling polyurethane sealant. The sealant cures to a flexible rubber when exposed to atmospheric moisture.

Basic Uses: Vulkem 638 SSL is specially designed for sealing level or slightly sloped joints and seams in railcar, truck trailer, utility trailer, roof and floor assemblies. It can also be used in horizontal joints and seams in architectural panels and pre-engineered buildings. TremPro 638 SSL cures to withstand movement, shear, deflection, and moisture in lap and butt joint applications.

| TremPro 638 SSL | | | |
|-----------------|-----------------|-------|------------|
| Stock No. | Size | Color | Carton Qty |
| V638G-29 | 29 oz Cartridge | Gray | 12 |
| V638GD | 50 gallon Drum | Gray | 1 |
| V638GSL | 20 oz Sausage | Gray | 15 |

TremPro Chem-X Pro (One-Part Hybrid Adhesive)

Product Descriptions: TremPro Chem-X Pro is a single component multi-purpose, non-sagging, high strength, hybrid polymer, adhesive sealant, designed to bond to a variety of substrates that are commonly found in manufacturing. It is solvent and isocyanate free, exhibits excellent weather resistance, and has both adhesive and sealant capabilities.

Basic Uses: Typical applications include but are not limited to all window substrates (glass, aluminum, pvc, & fiberglass), vehicles, RVs, cargo trailers, semi-trailers, truck bodies, steel tanks, HVAC units, boats, metal buildings, modular construction, cabinets, etc.

| TremPro Chem-X Pro | | | |
|--------------------|-----------------|-------|------------|
| Stock No. | Size | Color | Carton Qty |
| TX833B | 10 oz Cartridge | Black | 12 |
| TX833BSL | 20 oz Sausage | Black | 15 |
| TX833W | 10 oz Cartridge | White | 12 |
| TX833WSL | 20 oz Sausage | White | 15 |

TremPro LA1000

LA1000 is a high-quality adhesive based on modified polyurethanes and is three times stronger than conventional construction adhesives. This aggressive adhesive has been developed for use in commercial construction including subfloor assembly, interior drywall installation, SIPS panels, EIFS systems, landscaping bricks/blocks and natural stone. This adhesive has excellent long-term resistance to weathering, water, acids, and solvents. LA1000 has a 20-minute set time and can be applied at low temperatures. One 24-ounce can will yield the same as six to eight 20-ounce sausages, which will reduce packaging waste.

TMG501



| TremPro Chem-X Pro | | | |
|--------------------|-----------|---------|------------|
| Stock No. | Size | Color | Carton Qty |
| LA1000 | 24 oz Can | Natural | 12 |



ADHESIVES & SEALANTS





LaVanture Products is proud distributor of BASF, the #1 construction chemicals company worldwide, offering comprehensive single-source solutions such as high performance adhesive, sealant and coatings for transportation and industrial applications.



■ - BASF

MASTER BUILDERS SOLUTIONS

BASF products MasterBond™, MasterSeal™ and MasterCoat™ provide strong bonds and fast tack-free times. These bonds and sealants have a relatively low surface-free energy (surface tension), allowing easy adhesion to high surface energy, clean metal surfaces. Unlike other adhesives and sealants, this adhesion is achieved through chemical bonding rather than physio-chemical attraction.

This chemical bond results in cohesive failure. With cohesive failure, the adhesive or sealant bond is so strong it will rip apart before coming away from the substrate. Extensive testing is done to maximize the cohesive capability of these products under many different circumstances.

MasterWeld 948

Gun grade polyurethane bonding adhesive that creates a permanent overnight bond. It will expand to bridge gaps up to 3/8". Good for most universal bonding applications

MasterSeal 631 (Formerly DegaCoat 310)

MasterSeal 631 is a non-fibred asphalt emulsion specifically formulated for use as a protective underbody coating. It provides preventitive corrosion barriers for transporty applications. MasterSeal 631 is fiber-free for application by brush or spray.

Masterweld™/MasterSeal Products

| MasterWeld | | | |
|------------|-----------------------|----------------------|------------|
| Stock No. | Size | Color | Carton Qty |
| DGB948-10 | 10.1 fl oz. Cartridge | Lt. Brown. | 12 |
| DGC310-5 | 5 gal. | Cures to Matte Black | 1 |
| DGC310D | 53 gal. | Cures to Matte Black | 2 |



MasterSeal 22

MasterSeal 22 is polyurethane-based one component, moisture-curing adhesive/sealant. It maintains permanent flexibility with high bond strength providing outstanding durability.

MasterSeal 26

One component, general purpose sealant providing permanent adhesion and excellent tacking-time to speed production while providing superior protection.

MasterSeal 2000

A versatile one-component multi-purpose, elastomeric adhesive sealant that provides excellent performance on a wide variety of substrates and applications. Ultra fast tack for joints and seams.

| MasterSeal™ | | | |
|-------------|-----------------------|-------|------------|
| Stock No. | Size | Color | Carton Qty |
| DGS22G | 10.1 fl. oz Cartridge | Gray | 24 |
| DGS22W | 10.1 fl. oz Cartridge | White | 24 |
| DGS26B | 10.1 fl. oz Cartridge | Black | 24 |
| DGS26G | 10.1 fl. oz Cartridge | Gray | 24 |
| DGS26W | 10.1 fl. oz Cartridge | White | 24 |
| DGS26WSSG | 20.0 fl. oz Sausage | White | 20 |
| DGS2000B | 10.1 fl. oz Cartridge | Black | 24 |
| DGS2000S | 10.1 fl. oz Cartridge | Gray | 24 |
| DGS2000W | 10.1 fl. oz Cartridge | White | 24 |
| DGS2000C | 10.1 fl. oz Cartridge | Clear | 24 |



ADHESIVES & SEALANTS



LaVanture LS Series Specialty Sealants

LaVanture LS Series products are engineered to meet or exceed all the users specified sealant requirements. All LS series products are formulated to withstand the harshest environments and are continually tested to guarantee conformance with the high standards set by LaVanture for all of our sealant products. Applications include recreational vehicles, tractor trailers and buses. All of these specialty sealants are in stock for immediate shipment in single carton minimums.



LS200

LS200 Sealant/Adhesive is a paintable, fast curing adhesive/sealant formulated to exhibit superior adhesion and flexibility to a wide variety of substrates including: PVC, aluminum, stainless steel, galvanized steel, wood, FRP, marble, stone and laminate substrates. Eliminate squeaks with this solvent-free, non-isocyanate adhesive/sealant.

LS250

LS250 exhibits excellent adhesion to many substrates including aluminum, brass, steel, glass, mortar, granite, marble, wood and many plastics. Cures fast, even at low temperatures. Contains no solvents or isocyanates and is non-yellowing.

LS255

Semi-Self Leveling Roof Sealant

LS255 exhibits excellent adhesion to many substrates including: aluminum, brass, steel, glass, mortar, granite, marble, wood and many plastics. Cures fast, even at low temperatures. LS255 is highly weather resistant and can be painted with most paints. Contains no solvents or isocyanates and is non-yellowing. Authorized by the USDA.

LPC Sealants/Adhesives

| Stock No. | Material | Size | Color | Carton Qty |
|-----------|----------|-------------------|-------|------------|
| LS200W | Hybrid | 10.3 oz Cartridge | White | 24 |
| LSW200WS | Hybrid | 20.0 oz Sausage | White | 16 |
| LS250W | Hybrid | 10.3 oz Cartridge | White | 24 |
| LS250G | Hybrid | 10.3 oz Cartridge | Gray | 24 |
| LS250B | Hybrid | 10.3 oz Cartridge | Black | 24 |
| LS255G | Hybrid | 10.3 oz Cartridge | Gray | 24 |

LS Series Sealants are specially formulated for LaVanture products to meet the requirements of the Transportation, Recreational Vehicle and O.E.M industries. Custom formulas and colors are available. Please contact us for information and pricing.



THE STRONGEST FROM START TO FINISH

Liquid Nails

| Stock No. | Material | Size | Color | Carton Qty |
|------------|---------------|------------------|-----------|------------|
| LNP902-28 | Latex | 28 oz. Cartridge | White | 12 |
| LN903HD-10 | Latex | 10 oz. Cartridge | Tan | 24 |
| LN990QG-10 | Latex | 10 oz. Cartridge | White | 12 |
| LNP602-5 | Rubber | 5 Gal Pail | Light Tan | 1 |
| LN901MH-28 | Rubber | 10 oz. Cartridge | Light Tan | 24 |
| LN715TS-10 | Vinyl Acrylic | 10 oz. Cartridge | White | 24 |
| LN730M-10 | Silicone | 10 oz. Cartridge | White | 12 |

Contact Us About Freeze/Thaw Stability Questions. Liquid Nails offers a wide variety of options to fit your application needs. Chose from latex, rubber, silicone for mirrors, and vinyl acrylic.

Eternabond Roof Products

RoofSeal: Seal any rip, tear, or open seam in any surface with RoofSeal. RoofSeal is the best solution for leak repair. It is the choice of professional roof repair specialists, on virtually all roof types including EPDM, TPO, Hypalon, most PVC, modified, all metals, even copper and Kynar coated metals, tile, wood, concrete, etc. RoofSeal makes a permanent water-tight seal. Formulated as strong, fast drying, thermoplastic rubber adhesive sealants with controlled flow viscosity these products offer easy application and adhere to most surfaces including glass, fiberglass, steel, aluminum, rubber and most painted surfaces.

RV Seal: offers the same water-tight seal in a thinner profile of 21 mil thick.

Spray Primer: EternaPrime® is an adhesive and surface conditioner intended to aid adhesion of EternaBond® MicroSealant tapes, or other non- MicroSealant tapes such as butyl tapes and other self adhesive seaming tapes. EternaPrime® also prepares most contaminated surfaces for tape application.

AlumniBond Tape: Designed for use on metal buildings, trailer/RV roofs and sides, drain pans, drain pipes, ductwork, boats and as protective coating for surfaces where abrasion and corrosion resistance is required.


DoubleStick Tape: A self-sealing adhesive creating a water-tight between two or more irregular or similar or dissimilar surfaces. Used as a lap seal, gasket, hole seal or gap seal.

Anti-Wick: PVA/VA-E based adhesive that is designed to seal the ends and sides of materials such as plywood and OSB to keep moisture out.

| ADCO/EternaBond Products | | | | |
|--------------------------|--------------------------------|---------------|------------|------------|
| Stock No. | Description | Size | Color | Carton Qty |
| LRSB-2-50 | Microsealant Roof Seal | 2" x 50' | Black | 12 |
| LRSB-3-50 | Microsealant Roof Seal | 3" x 50' | Black | 8 |
| LRSB-8-50 | Microsealant Roof Seal | 8" x 50' | Black | 3 |
| LRSB-24-50 | Microsealant Roof Seal | 24" x 50' | Black | |
| LRSG-2-50 | Microsealant Roof Seal | 2" x 50' | Gray | 12 |
| LRST-3-50 | Microsealant Roof Seal | 3" x 50' | Tan | 8 |
| LRSW-1.5-50 | Microsealant Roof Seal | 1.5" x 50' | White | 16 |
| LRSW-2-50 | Microsealant Roof Seal | 2" x 50' | White | 12 |
| LRSW-3-50 | Microsealant Roof Seal | 3" x 50' | White | 8 |
| LRSW-4-50 | Microsealant Roof Seal | 4" x 50' | White | 6 |
| LRSW-6-50 | Microsealant Roof Seal | 6" x 50' | White | 4 |
| LAB-2-50 | AlumniBond Tape | 2" x 50" | Aluminum | 12 |
| LAB-4-50 | AlumniBond Tape | 4" x 50" | Aluminum | 6 |
| LOPS-1 | Spray Primer | 12.2 oz can | Clear | 12 |
| LDS-1-50 | Double Stick Tape | 1" x 50' | Black | 24 |
| LDS-2-50 | Double Stick Tape | 2" x 50' | Black | 12 |
| LRVST-2.75-100 | Micro Sealant RV Seal | 2.75"x 100' | Tan | 8 |
| LRVSW-2.5-100 | Micro Sealant RV Seal | 2.5"x 100' | White | 8 |
| LRVSW-2.5-50 | Micro Sealant RV Seal' | 2.5"x 50' | White | 8 |
| LRVSW-2.75-100 | Micro Sealant RV Seal' | 2.75"x 100' | White | 8 |
| LRVSW-2-50 | Micro Sealant RV Seal | 3"x 50' | White | 12 |
| LLS7030B-5 | Low Viscosity Adhesive Sealant | 5 gallon Pail | Black | 1 |
| LMS7035B-5 | Mid Viscosity Adhesive Sealant | 5 gallon Pail | Black | 1 |
| LMS7036A-5 | Mid Viscosity Adhesive Sealant | 5 gallon Pail | Aluminum | 1 |
| LLS7030B-5 | Low Viscosity Adhesive Sealant | 5 gallon Pail | Black | 1 |
| LMS7035B-5 | Mid Viscosity Adhesive Sealant | 5 gallon Pail | Black | 1 |
| LMS7036A-5 | Mid Viscosity Adhesive Sealant | 5 gallon Pail | Aluminum | 1 |
| LLPC7763B-5 | HydroArmor | 5 Gal Drum | Black | 20 |
| RA13180-5 | Synthetic Rubber | 5 Gal Drum | Green Tint | 1 |
| RA13180D | Synthetic Rubber | 54 Gal Drum | Green Tint | 1 |
| RA13678B-5 | Anti-Wick | 5 Gal Pail | Black | 1 |
| RA13680W-5 | Anti-Wick | 5 Gal Pail | White | 1 |
| RA13680WD | Anti-Wick | 55 Gal Drum | White | 1 |



ADCO/EternaBond is an integrated adhesives and sealants company with operations strategically located around the world. Their technologies are integral to many cutting-edge industrial trends, contributing to a more efficient, more productive and more sustainable future. LaVanture Products is proud to have been selected as an Adco/EternaBond distributor.



ETERNABOND SEALANT TAPE



Advanced Adhesive Technologies (AAT)

AAT is the leader in adhesives technology. Their adhesives cover the entire range of floor covering products, from carpet and ceramic tile to wood flooring and vinyl sheet goods.



AAT272: Specially formulated water-based adhesive designed not only for the installation of felt backed sheet vinyl but also solid vinyl sheet goods [including “fiberglass” backed] intended for full-spread installations. AAT-272 can also be used to install linoleum, vinyl [12”x12” max.] or rubber tiles [24”x24” max.]. This unique adhesive will not stain or discolor resilient floors and eliminates the need to inventory several different adhesives for various types of sheet vinyls from a variety of manufacturers. This Super-Premium product provides adequate “slip time” and greatly reduces the “gassing” tendency common with most adhesives when installing nonporous floor coverings. While this adhesive is specifically intended for the installation of resilient floorings it can be used to install virtually any carpet regardless of the backing type.



AAT322: AAT-322 FG Sheet Vinyl PSA is an acrylic based adhesive specifically formulated for installing sheet vinyl with fiberglass cores and PVC cushioned backs intended for use with pressure sensitive adhesives (PSA). AAT-322 can be used on all grade levels over concrete and approved wood sub-floors in the absence of excessive moisture emissions and alkalinity. (MVER max. 5lbs./ 1000 sq ft/ 24 hours ASTM F 1869, RH 75% ASTM F 2170, pH 5-10) AAT-322 is nonflammable, contains no carcinogens, no solvents and is non-toxic. AAT-322 has excellent plasticizer migration resistance. AAT-322 is freeze-thaw stable. This zero VOC adhesive is protected by the CleanGuard® two-stage antimicrobial.

CleanGuard® is a specifically formulated broad-spectrum, anti-microbial agent that protects our adhesives and sealers from microorganisms, such as mold or mildew, in both the wet and dry state.



AAT MB188: Masterbond 188 is a 0 VOC, fast tack adhesive designed for the installation of glue-down carpets. This nonflammable adhesive is protected by the CleanGuard® two-stage antimicrobial. CleanGuard® is a specifically formulated broad-spectrum, anti-microbial agent that protects our adhesives and sealers from microorganisms, such as mold or mildew, in both the wet and dry state. Masterbond 188 is recommended for use with the following carpet backings: woven polypropylene (ActionBac®), polyurethane foam, jute, rubber, and needlepunch. Due to its non-staining formula, Masterbond 188 can be used to install felt backed sheet vinyl. NOTE: This adhesive is not recommended for pure vinyl backed sheet goods or carpets.



| AAT Products | | | |
|--------------|-------------------|-------|------------|
| Stock No. | Description | Size | Carton Qty |
| AAT272 | Flooring Adhesive | 4 Gal | 1 |
| AAT322 | Flooring Adhesive | 4 Gal | 1 |
| AATMB188 | Flooring Adhesive | 4 Gal | 1 |


Structural Adhesives

LaVanture offers some of the most advanced structures adhesives from some of the best manufacturers in the world! Structural adhesives offer a great alternative to mechanical fasteners. With a wide variety of options, whether you are looking for a gun grade Hybrid Polymer with great green strength, a Polyurethane with a slightly longer 'Open' worktime, or an adhesive that is in a tape form. These specialty adhesives offer additional benefits like vibration distribution, production efficiency, and flexibility. Our products meet or exceed industry standards, all with competitive pricing and sales support.

LK140 is one-part gun grade polyurethane that replaces mechanical fasteners in most applications. This adhesive sealant has a permanent elasticity and is a fast moisture curing adhesive. Weather resistant temperature range of -80 F to 200 F.

ChemX has exceptional green strength, virtually giving your production team an extra hand. A single component hybrid polymer has an average Open worktime of under 15 minutes, great flexibility, and is solvent and isocyanate free.

3M 760 is a Silane Modified Polymer (SMP). This single component creates a weather-resistant malleable bond between dissimilar substrates. Exhibits excellent UV resistance and maintains its flexibility for long-term joint movement.

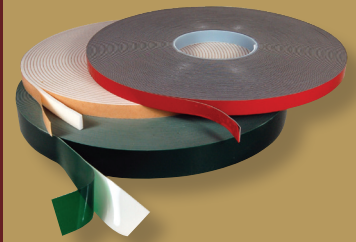

VHB tapes, see page 12.



STRUCTURAL ADHESIVES

| Structural Adhesives | | | | |
|----------------------|-------------------------|-----------------|-------|------------|
| Stock No. | Description | Size | Color | Carton Qty |
| LK140BSSG | Korapur Polyurethane | 20 oz Sausage | Black | 12 |
| LK140WSSG | Korapur Polyurethane | 20 oz Sausage | White | 12 |
| 3M-560 | Polyurethane | 20 oz Sausage | White | 12 |
| 3M-760 | Silane Modified Polymer | 20 oz Sausage | White | 12 |
| TX833B | Hybrid Polymer | 10 oz Cartridge | Black | 12 |
| TX833BSL | Hybrid Polymer | 20 oz Sausage | Black | 15 |
| TX833W | Hybrid Polymer | 10 oz Cartridge | White | 12 |
| TX833WSL | Hybrid Polymer | 20 oz Sausage | White | 15 |



Sealant Technical Specifications

| Product No. | Technology | Adhesive/Sealant | Strength | Paintable | Tack Free Time Hours | Full Cure Hours | Shelf Life Months | VOC Meets Threshold | Flexibility |
|---------------------|------------------------------|------------------|----------|-----------|----------------------|-----------------|-------------------|---------------------|-------------|
| LN990QG-10 | Latex | Adhesive | 8 | Yes | 1 | 24 | 12 | No | 200 |
| LNP902 | Latex | Adhesive | 10 | Yes | 0.5 | 24 | 12 | Yes | 200 |
| LA1000 | Polyurethane | Adhesive | 10 | NA | 0.5 | 24 | 15 | No | 0 |
| LNP602 | Solvent Elastomeric | Adhesive | 8 | Yes | 0.25 | 24 | 12 | Yes | 800 |
| LNx-01 | Solvent Elastomeric | Adhesive | 10 | Yes | 0.25 | 24 | 12 | No | 600 |
| LES900 | Elastomeric Sealant | Adhesive/Sealant | 7 | Yes | 0.5 | 24 | 12 | No | 400 |
| LS255 | MS (hybrid polyether) | Adhesive/Sealant | 7 | Yes | 0.5 | 24 | 12 | Yes | 341 |
| TX833 | MS (hybrid urethane) | Adhesive/Sealant | 10 | Yes | 0.25 | 72 | 12 | Yes | 412 |
| RA12608(SolidSeal) | Polyurethane | Adhesive/Sealant | 8 | Yes | 0.75 | 72 | 12 | Yes | 400 |
| DGB948 | Polyurethane | Adhesive/Sealant | 9 | Yes | 1.5 | 2 | 12 | Yes | 0 |
| LK140 | Polyurethane | Adhesive/Sealant | 10 | Yes | 0.75 | 72 | 12 | Yes | 400 |
| RA12176(Solid Bond) | Polyurethane | Adhesive/Sealant | 10 | Yes | 0.75 | 72 | 12 | Yes | 500 |
| LS200 | SPUR (hybrid urethane) | Adhesive/Sealant | 7 | Yes | 0.5 | 24 | 12 | Yes | 500 |
| LS250 | SPUR (hybrid urethane) | Adhesive/Sealant | 8 | Yes | 0.5 | 24 | 12 | Yes | 500 |
| LAT2 | Foam Core | High Bond Tape | 10 | NA | NA | NA | 24 | Yes | 900 |
| CVF | Foam Core | High Bond Tape | 10 | NA | NA | NA | 12 | Yes | 0 |
| THB | Foam Core | High Bond Tape | 10 | NA | NA | NA | 12 | Yes | 0 |
| LAT3 | Solid Acrylic | High Bond Tape | 10 | NA | NA | NA | 24 | Yes | 500 |
| T200 | Acetoxy Silicone | Sealant | 0 | No | 0.5 | 24 | 12 | Yes | 500 |
| LS100 | Acetoxy Silicone | Sealant | 0 | No | 0.5 | 24 | 24 | Yes | 570 |
| T655 | Acrylic Latex | Sealant | 0 | Yes | 0.25 | 24 | 12 | Yes | 200 |
| LS25 | Acrylic Latex | Sealant | 0 | Yes | 0.5 | 72 | 24 | Yes | 350 |
| DGS310 | Asphalt Eemulsion | Sealant | 0 | No | 1 | 12 | 6 | Yes | 0 |
| RA12781(Silaprene) | Block Copolymer | Sealant | 0 | Yes | 0.5 | 24 | 12 | No | 500 |
| LB-100 | Butyl Coated Foam | Sealant | 0 | No | Skinning | Non-Cure | 24 | Yes | 0 |
| T651 | Butyl Rubber | Sealant | 0 | Yes | 24 | 72 | 12 | No | 0 |
| LNTG | Elastomeric Acrylic Urethane | Sealant | 0 | Yes | 0.5 | 72 | 24 | Yes | 800 |
| RA12724(Silaprene) | EPDM Polymer | Sealant | 0 | Yes | 0.5 | 24 | 12 | No | 400 |
| TH600 | Neutral Silicone | Sealant | 0 | No | 0.5 | 72 | 12 | Yes | 500 |
| LS150 | Neutral Silicone | Sealant | 0 | No | 0.5 | 30 | 18 | Yes | 650 |
| V626 | Polyurethane | Sealant | 0 | Yes | 48 | 72 | 12 | Yes | 200 |
| V635 | Polyurethane | Sealant | 0 | Yes | 0.75 | 72 | 12 | Yes | 600 |
| V638 | Polyurethane | Sealant | 0 | Yes | 0.75 | 2 | 12 | Yes | 600 |
| DGS22 | Polyurethane | Sealant | 0 | Yes | 0.5 | 72 | 12 | Yes | 800 |
| DGS26 | SPUR (hybrid urethane) | Sealant | 0 | Yes | 0.5 | 72 | 9 | Yes | 238 |
| Eternabond | Thermoplastic | Sealant | 0 | No | NA | NA | 60 | Yes | 500 |
| DGS2000 | Thermoplastic Elastomeric | Sealant | 0 | Yes | 0.5 | 336 | 6 | No | 550 |
| T659 | Thermoplastic Elastomeric | Sealant | 0 | Yes | 0.5 | 72 | 12 | No | 800 |
| ANTI-WICK | Water based | Sealant | 0 | Yes | 0.5 | 24 | 12 | Yes | 0 |

NONE

GOOD

BETTER

BEST

EXCELLENT

Industry Applications Chart

ELECTRICAL

Wire Looms
Flexible Aluminum Ducts
Electrical Connectors
Coated Clamps
Cable Ties
Snap Bushings/Plugs
Fireplaces

PLUMBING

Tanks
Compartment Hatches
Fill Hoses
Pressure Hoses
Dump Valves
Hose Clamps

POWER ACCESSORIES

4-Way Connectors
7-Way Connectors
Battery Boxes/Trays
Breakways
Converters/Chargers
Electric Jacks

TRIMS/SEALS

Standard Edge Trims
Hollow Bulbs
Rectangular Bulbs
Wipers
Screw Covers
Foam Tapes

TAPES

Electrical Tapes
Foam Tapes
Conspicuity/DOT Tapes
Marking Tapes
Glazing Tapes

LIFT ASSISTS

Gas Springs
Brackets
Traction Springs
Actuators

SEALANTS & ADHESIVES

Latexes | Silicones
Butyls | Urethanes
Spray Adhesives
EternaBond Tapes
Light Duty Tapes



EMERGENCY

Fire Extinguishers
Extinguisher Pockets
Triangle Kits
Smoke/CO Alarms

STRUCTURAL ADHESIVES

Mounting Tapes
Hybrid Adhesives
VHB Tapes

ROOF SEALANTS

EnteraBond
Self Leveling Urethanes
AlumiBond
RV Seal

MOLDED EXTRUDED

Grab Handles
Screw Covers
Door Hold Backs
Battery Box
Reserve Covers
Bushings/Plugs
Rigid Dividers

HARDWARE

E-Track
Gas Props
Gas Prop Brackets
Traction Springs
Actuators
Rope Tie Downs

SAFETY

Fire Extinguishers
Extinguisher Pockets
Smoke/CO Alarms
Marine Grade Grit Tapes
Fencing Tapes
Safety Kits



CHECK OUT OUR COMPLETE LINE OF PRODUCTS



Molded Extruded | Hardware | Trims & Seals

LaVanture Guarantee

LaVanture Products puts a great deal of effort into vetting our suppliers and the products that we supply our industries. However, things can happen, which is why all products are backed by 12 months free from manufacture defects. Contact us for more details.

**3806 Gallatin Way
Post Office Box 2088
Elkhart, IN 46515-2088**

**Phone: 574-264-0658
Fax: 574-264-6601
E-mail: sales@lavanture.com**

www.lavanture.com

PROUD MEMBERS



UPDATED MAY 2026